



DML234040DWH

Downlights

Milano

Recessed
Commercial LED Downlight





Features

- Die-cast aluminium body for efficient heat dissipation
- High efficacy LED technology 100lm/W
- Excellent glare control with set back optical design
- Quick release mounting clips for easy installation or maintenance

Technical Specifications

Light Source	High performance SMD
Correlated colour temp.	4000K
MacAdam Step (SDCM)	≤3 MacAdam
Light Distribution	60°
Unified Glare Rating	*UGR <19
Lumen Output	3700lm
Cyanosis Compliance	N/A
Colour rendering index	Ra≥90, R9≥50
Lumen maintenance	L90 B10 >50,000 hours
Trim colour	White
Mounting	Recessed
Diffuser type	Polycarbonate
Ingress protection	IP54
Rated supply voltage	220-240V AC
Mains frequency	50 Hz
Driver type	DALI-2 remote constant current

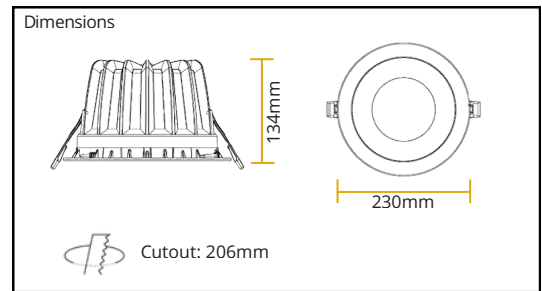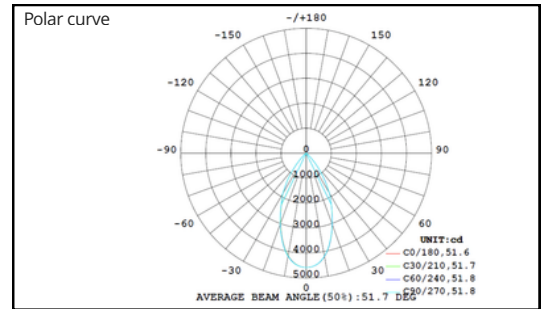

Order Code: DML234040DWH

FAMILY	Size	Wattage	CCT	Driver Type	Finish
DML Downlight Milano	23 230mm	40 25 / 2500lm	40 3000 3500 4000 Tuneable White CYanosis Compliant RGBW	D Non dim Phase dim DALI-2	WH White trim BlacK trim SiLver trim
		40 33 / 3200lm			
		40 40 / 3700lm			

*The maximum UGR rating of the product is UGR 19 as per CIE UGR tables for standardized conditions based on fixed room sizes and specific room surface reflectance combinations.