DML110830DWHKP

Downlights

# Milano KP

## 110mm Recessed IP65 IK10 Commercial LED Downlight

UGR <19 | IK10 | IP65 | DALI-2 AVAILABLE | 5 YEAR WARRANTY

## Features

- Die-cast aluminium body for efficient heat dissipation
- High efficacy LED technology 100lm/W
- Excellent glare control with set back optical design
- Quick release mounting clips for easy installation or maintenance

Polar curve




Dimensions

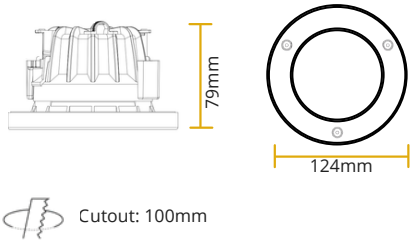


Cutout: 100mm

## Technical Specifications

| | |
|---|---|
| **Light Source** | High performance SMD |
| **Correlated colour temp.** | 3000K |
| **MacAdam Step (SDCM)** | ≤3 MacAdam |
| **Light Distribution** | 60° |
| **Unified Glare Rating** | *UGR <19 |
| **Lumen Output** | 800lm |
| **Cyanosis Compliance** | N/A |
| **Colour rendering index** | Ra≥90, R9≥50 |
| **Lumen maintenance** | L90 B10 >50,000 hours |
| **Trim colour** | White |
| **Mounting** | Recessed |
| **Diffuser type** | Polycarbonate |
| **Ingress protection** | IP65 |
| **Rated supply voltage** | 220-240V AC |
| **Mains frequency** | 50 Hz |
| **Driver type** | DALI-2 remote constant current |

## Order Code: DML110830DWHKP

| FAMILY | Size | Wattage | CCT | Driver Type | Finish | Special |
|---|---|---|---|---|---|---|
| **DML** Downlight MiLano | **11** 110mm | **08** 8 / 800lm | **30** 3000 | **D** Non dim | **WH** WHite trim | **KP** IK10 / IP65 |
| | | **12** / 1100lm | 3500 | Phase dim | BlacK trim | |
| | | | 4000 | DALI-2 | | |
| | | | Tuneable White | | | |
| | | | CYanosis Compliant | | | |
| | | | RGBW | | | |

*The maximum UGR rating of the product is UGR 19 as per CIE UGR tables for standardized conditions based on fixed room sizes and specific room surface reflectance combinations.

**SAL Commercial** +61 2 8717 4320
sales@salcommercial.net.au
quotations@salcommercial.net.au
Servicing QLD / NSW-ACT / VIC-TAS / SA-NT / WA / NZ



PDF Prepared: 30.06.2026 11:13am
Last page update: Jun 2026
© Copyright SAL Commercial - All Rights Reserved