SAL COMMERCIAL

DMLS202040DWH

Downlights

Milano S

200mm Surface Mount Commercial LED Downlight

UGR <19 | IK08 | IP65 | DALI-2 AVAILABLE | 5 YEAR WARRANTY

Features

- Die-cast aluminium body for efficient heat dissipation
- High efficacy LED technology 100lm/W
- Excellent glare control with set back optical design
- Extruded aluminium body finished in durable powdercoated White or Black finish

Polar curve



Dimensions

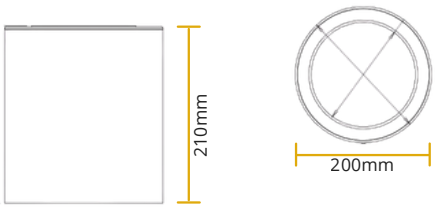

Technical Specifications

Light Source	High performance SMD
Correlated colour temp.	4000K
MacAdam Step (SDCM)	≤3 MacAdam
Light Distribution	60°
Unified Glare Rating	*UGR <19
Lumen Output	1900lm
Cyanosis Compliance	N/A
Colour rendering index	Ra≥90, R9≥50
Lumen maintenance	L90 B10 >50,000 hours
Trim colour	White
Mounting	Recessed
Diffuser type	Polycarbonate
Ingress protection	IP65
Rated supply voltage	220-240V AC
Mains frequency	50 Hz
Driver type	DALI-2 integral constant current

Order Code: DMLS202040DWH

FAMILY		Size		Wattage		CCT		Driver Type		Finish	
DMLS	**D**ownlight **MiL**ano **S**urface	**20**	**20**0mm	**20**	**15** / 1500lm	**40**	**30**00	**D**	**N**on dim	**WH**	**WH**ite trim
					20 / 1900lm		**35**00		**P**hase dim		**Blac**K trim
					25 / 2400lm		**40**00		**D**ALI-2		
					30 / 2900lm		**T**uneable **W**hite				
							CYanosis Compliant				
							RGBW				

*The maximum UGR rating of the product is UGR 19 as per CIE UGR tables for standardized conditions based on fixed room sizes and specific room surface reflectance combinations.

SAL Commercial +61 2 8717 4320
sales@salcommercial.net.au
quotations@salcommercial.net.au
Servicing QLD / NSW-ACT / VIC-TAS / SA-NT / WA / NZ

PDF Prepared: 30.06.2026 11:13am
Last page update: Jun 2026
© Copyright SAL Commercial - All Rights Reserved