







LED LINEAR PROFILE

ARROW X LED Linear Profile


Arrow X is a lighting system manufactured from extruded aluminum and manufactured to the exact specifications of each individual project. Assembled and tested in our manufacturing facility in Sydney, NSW and specified with the highest quality components, Arrow X is available in suspended, surface mount and recessed options.

Manufactured to project specifications



LED LINEAR RANGE


SUSPENDED

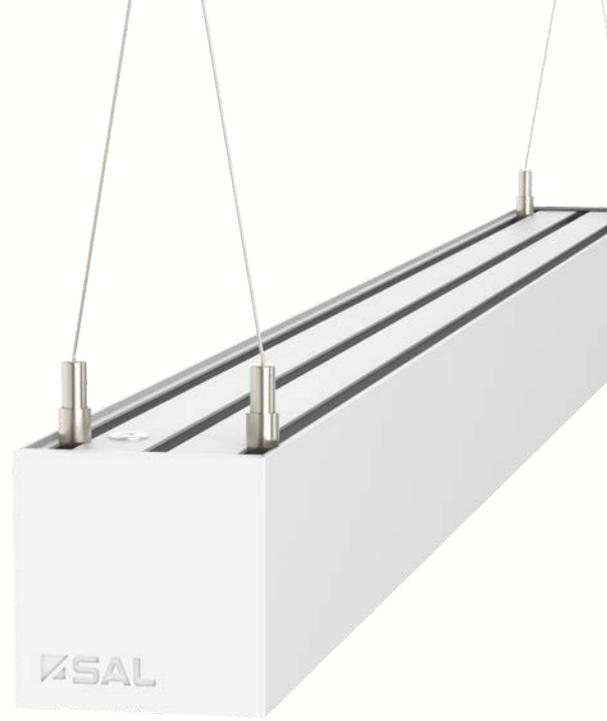

SURFACE



RECESSED

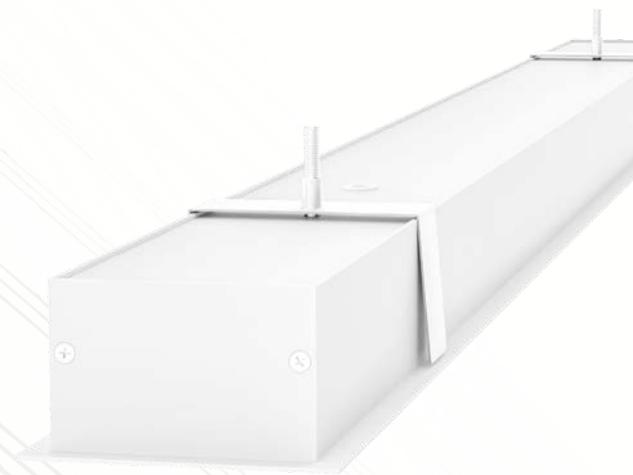

LED LINEAR


SUSPENDED/SURFACE


S4545



ARROW X LED Linear Profile - S4545 Suspended

Custom made to your exact project specifications, the S4545 suspended range is constructed from continuous extruded aluminium and manufactured in Australia. Designed to enhance modern architectural interiors, the suspended Arrow X range is available in a range of lumen packages and specifications.

Configurations 

Dimension 

Performance

<p>Direct light source</p> <p>16-33w p/m</p> <p>5000lm Max p/m</p>	<p>Indirect light source</p> <p>15w p/m</p> <p>900lm Max p/m</p>
--------------------------------------------------------------------	------------------------------------------------------------------




 Magnetic tool free end cap

ARROW X LED Linear Profile - S4545 Surface Mount

Custom made to your exact project specifications, the S4545 surface mount range is constructed from continuous extruded aluminium and manufactured in Australia. Designed to enhance modern architectural interiors, the surface mounted Arrow X range is available in a range of lumen packages and specifications and supplied with a unique tool free mounting system.

Configurations 

Dimension 

Performance

<p>Direct light source</p> <p>16-33w p/m</p> <p>5000lm Max p/m</p>



 Magnetic tool free end cap



LED LINEAR


SUSPENDED/SURFACE

S45100



ARROW X LED Linear Profile - S45100 Suspended


Custom made to your exact project specifications, the S45100 suspended range is constructed from continuous extruded aluminium and manufactured in Australia. Designed to enhance modern architectural interiors, the suspended Arrow X range is available in a range of lumen packages and specifications.

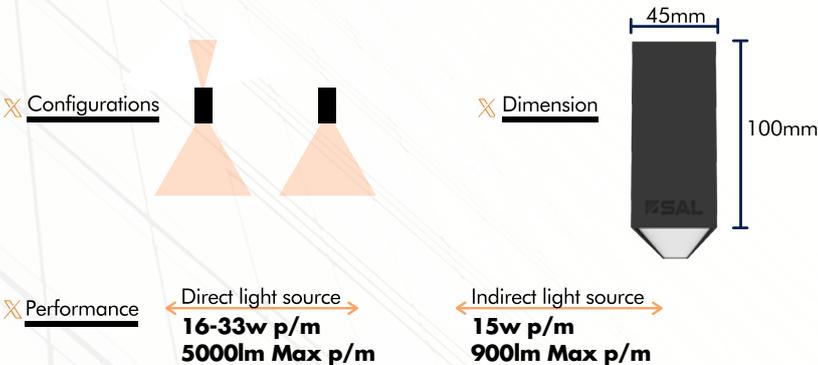

Magnetic tool free end cap

ARROW X LED Linear Profile - S45100 Surface Mount

Custom made to your exact project specifications, the S45100 surface mount range is constructed from continuous extruded aluminium and manufactured in Australia. Designed to enhance modern architectural interiors, the surface mounted Arrow X range is available in a range of lumen packages and specifications and supplied with a unique tool free mounting system.

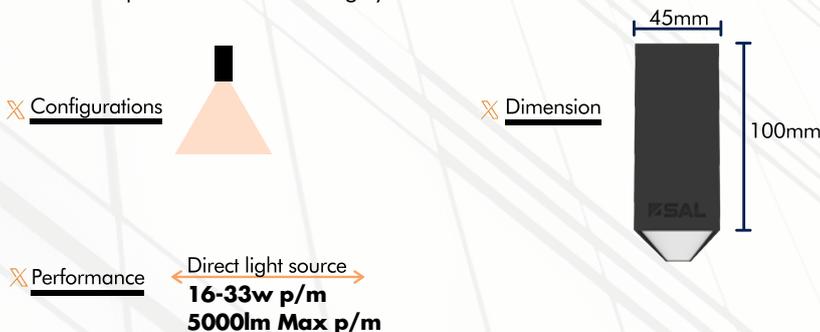

Magnetic tool free end cap



LED LINEAR


SUSPENDED/SURFACE

S8082




ARROW X LED Linear Profile - S8082 Suspended

Custom made to your exact project specifications, the S8082 suspended range is constructed from continuous extruded aluminium and manufactured in Australia. Designed to enhance modern architectural interiors, the suspended Arrow X range is available in a range of lumen packages and specifications.

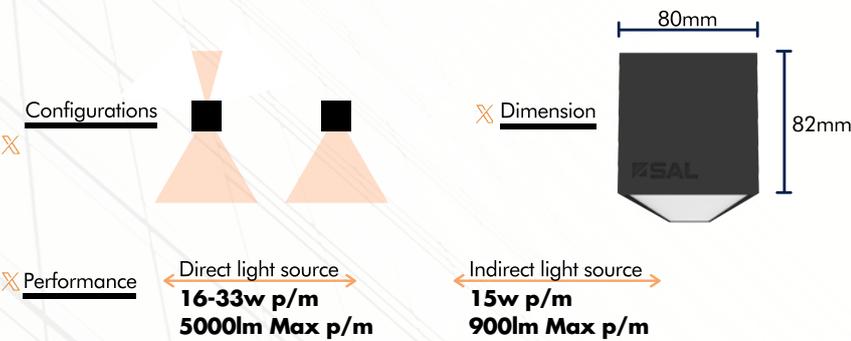

ARROW X LED Linear Profile - S8082 Surface Mount


Custom made to your exact project specifications, the S8082 surface mount range is constructed from continuous extruded aluminium and manufactured in Australia. Designed to enhance modern architectural interiors, the surface mounted Arrow X range is available in a range of lumen packages and specifications and supplied with a unique tool free mounting system.

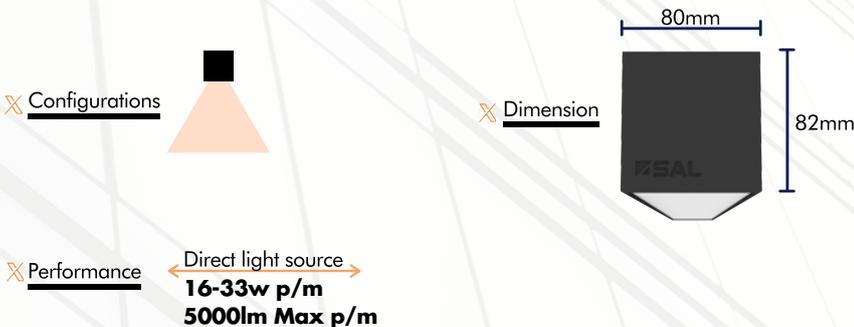

LED LINEAR RECESSED

R45

R80

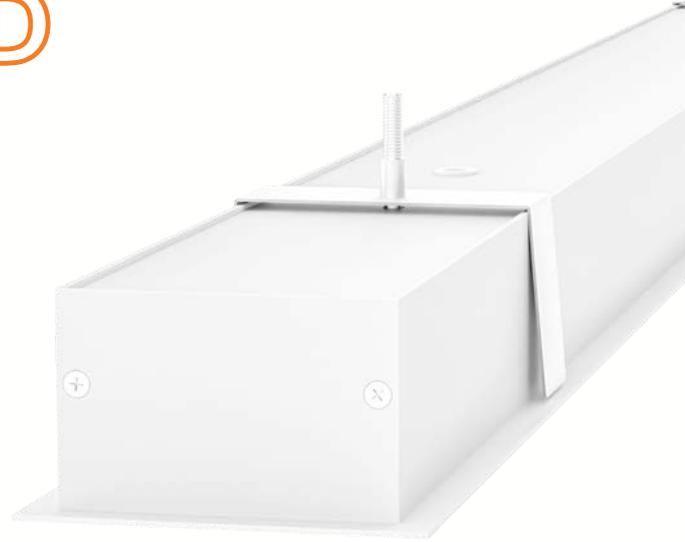



ARROW X LED Linear Profile - R45/R80 Recessed

Custom made to your exact project specifications, the R45/R80 recessed range is constructed from continuous extruded aluminium and manufactured in Australia. Designed to enhance modern architectural interiors, the suspended Arrow X range is available in a range of lumen packages and specifications and supplied with a unique tool free mounting system.

✕ Configurations



✕ Dimension



✕ Performance

← Direct light source →
16-33w p/m
5000lm Max p/m

LED LINEAR

COMPONENTS & SPECIFICATION

- ✘ Energy efficient 130lm/w
- ✘ 3000k, 3500k, 4000k and Tunable white CCT
- ✘ SDCM <3 LEDs
- ✘ Ultra low glare optics available
- ✘ Integral Tridonic drivers available in DALI
- ✘ Direct / indirect configuration options

 **Manufactured to project specifications**

TRIDONIC 



SAL Commercial Pty Ltd

📍 40 Biloela St, Villawood NSW 2163

☎ 02 8717 4320

✉ sales@salcommercial.net.au

VIC/SA/NT/TAS

📍 40 Biloela St, Villawood NSW 2163

☎ 02 8717 4320

✉ sales@salcommercial.net.au

QLD

📍 36 Whitelaw Pl, Richlands QLD 4077

☎ 07 3879 5999

✉ sales@salcommercial.net.au

WA

📍 29 Beringarra Ave, Malaga WA 6090

☎ 02 8717 4320

✉ sales@salcommercial.net.au